



The Most Ingenious Pet Products On The Planet

MS-5 Electronic Pet Collar



*For Use With
All Power Pet Doors*

OPERATING INSTRUCTIONS

MS-5 ELECTRONIC PET COLLAR

1. Activating Your MS-5 Electronic Pet Collar

NOTE : Our proprietary B3V1A battery (pictured below) is the **ONLY** battery that is compatible with the MS-5 collar. Do not attempt to use any other battery in the MS-5 collar. This battery should last at least 3 months at a time in your collar.

NOTE : Some collars are shipped with a battery pre-installed. If the battery is not already pre-installed in the collar, install the battery by the following instructions on page 3.



2. Fitting the MS-5 Electronic Collar on your Pet

- Place the collar on your pet with the electronics at the throat as shown above.
- When properly fitted, the receiver collar should not move on the pet, but also should not be overly tight. You should be able to fit your fingers between the strap and your pet's neck.

NOTE : The collar needs to be positioned on the bottom of your pet's neck, facing down, in order to trigger the door and sensors correctly.

Replacement B3V1A batteries are available at www.hightechpet.com under the batteries tab.



COLLAR FUNCTIONS

NOTE : There is no pairing or syncing required with our collars and power pet doors, once the battery is installed, the collar is powered on.

1. ULTRASONIC TRANSDUCER : Built in ultrasonic generator emits a continuous ultrasonic signal to control your power pet door.

2. TEST BUTTON : Pressing this button tests the battery for battery status.

3. TEST LIGHT INDICATOR : This red light indicates battery life, as the battery drains, this red light will become more and more dim, once no light is present, this indicates that the battery needs to be replaced. We recommend testing your collar periodically as needed.

1. ULTRASONIC
TRANSDUCER

2. TEST BUTTON



3. TEST LIGHT
INDICATOR

INSTALLING/ REPLACING THE MS-5 BATTERY

- 1.** Unscrew the battery cover located on back of MS-5 cover.



- 2a.** Pry back cover off at area shown in, "Pry Area" image.

PRY AREA



*Use a small flat-blade screwdriver or metal nail file

- 3.** Remove MS-5 back and note the battery position. It's important that the battery label faces up and is visible.

Non-label side of battery



Label side of battery




INSTALLING/ REPLACING THE MS-5 BATTERY

4. Remove and replace B3V1A battery.



5. Close back cover. Press on back cover until bottom and top of back are flush with the front of the case.

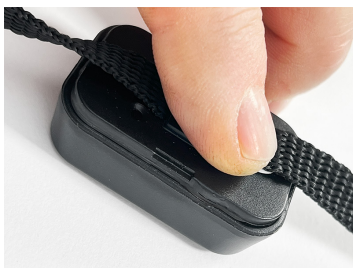

6. Replace and tighten back screw.

Flush Back Cover



MAINTAINING THE WATERPROOF SEAL

The waterproof seal will last for years if you keep the rubber gasket clean when replacing the battery. Here are some suggestions for extending the life of your collar.

- Clean the bottom edge of the collar before opening the case to replace a battery. Also thoroughly dry the collar before opening it. A blow dryer can be used.
- After opening the case, clean any visible dirt off the inside lip of the case and the gasket on the bottom cover. Finally blow off any remaining lint or fibers. Then insert the battery and close it up.
- Keep the inside of the collar dry. Each time you open it look for water or moisture inside. If detected, remove the battery and use a blow dryer on the circuit board.

MS-5 ADJUSTABLE COLLAR STRAP LENGTH



26 " IN LENGTH

TROUBLESHOOTING :

How to test your MS-5 collar for proper functionality :

Press the round black test button on the collar, make sure it illuminates a bright red. If it does not, then replace the battery.

If it does illuminate a bright red, next I want you to take the collar, without pressing anything on the collar, and hold the collar up to your ear.

Do you hear a slight humming and/or ticking sound coming from the collar?

If not - the collar needs to be replaced, something within the circuitry of the collar has malfunctioned.

If you do hear the sound - next I want you to go over to the door. Make sure the inside and outside sensor buttons are both illuminated green. If they are not turn them on. Also make sure the range adjustment knobs are both set to the mid way point.

Beyond that, try cleaning the sensors on the door, which are located right beneath the opening of your door panel where your pet passes through (they are silver and circular) with water and a cotton swab, do not use any chemical products.

Help is right here!

We've got you. For general questions
and technical support call us at

1-800-255-1279

Monday-Friday 6:30 am - 4:00 pm PST



CAUTION: As with any pet door, supervision of your pet at all times is advised. Failure to do so could result in harm to your pet. Please be sure to provide water and shade outside in the rare event that your pet door were to malfunction.



High Tech Pet Products, Inc.

2111 Portola Rd. Suite A
Ventura, California 93003

www.hightechpet.com

